
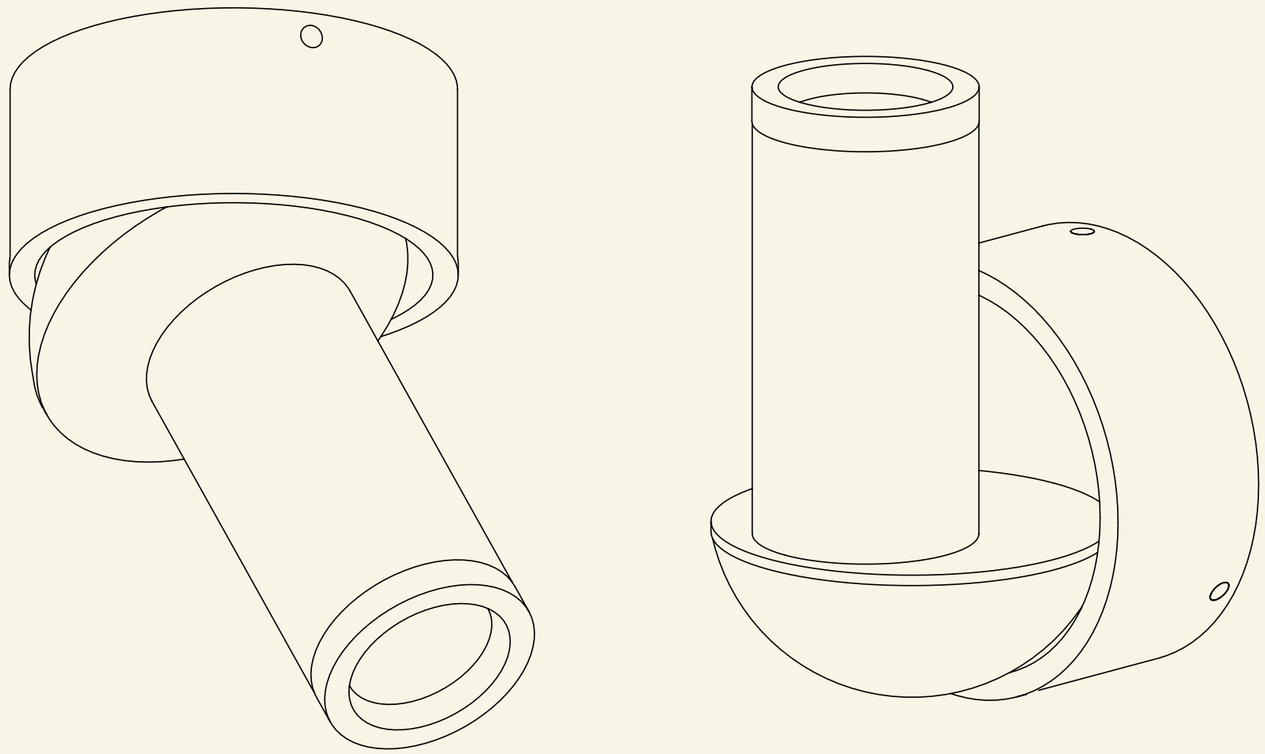


ODIS • FLUSH MOUNT & SCONCE

2350 BROADWAY SUITE 404 NEW YORK, NY 10024
SUPPORT@STUDIOLUDDITE.COM (917) 423 2443


CONTENTS:	FIXTURE BODY (x1)	LENS CAP (x1)	SCREWS (x3)	CROSSBAR (x1)	FASTENER KIT (x1)		
LAMPING:	GU10 (x1) *NOT INCLUDED			MAX WATTAGE:	10 WATTS		

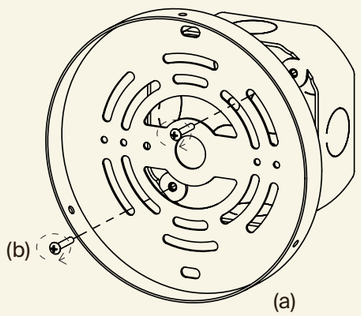

1.

DANGER: ELECTRIC SHOCK HAZARD. BEFORE INSTALLATION DE-ENERGIZE CIRCUIT. INSTALLATION BY A QUALIFIED ELECTRICIAN ONLY.


Attach crossbar (a) to junction box with provided screws (b).

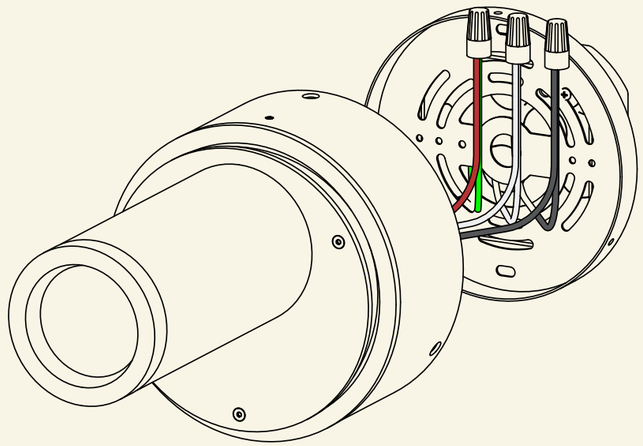

2.


Connect the ground wire first, then connect line and neutral wires.

Colors shown depict typical U.S. installation. International wiring standards may vary.

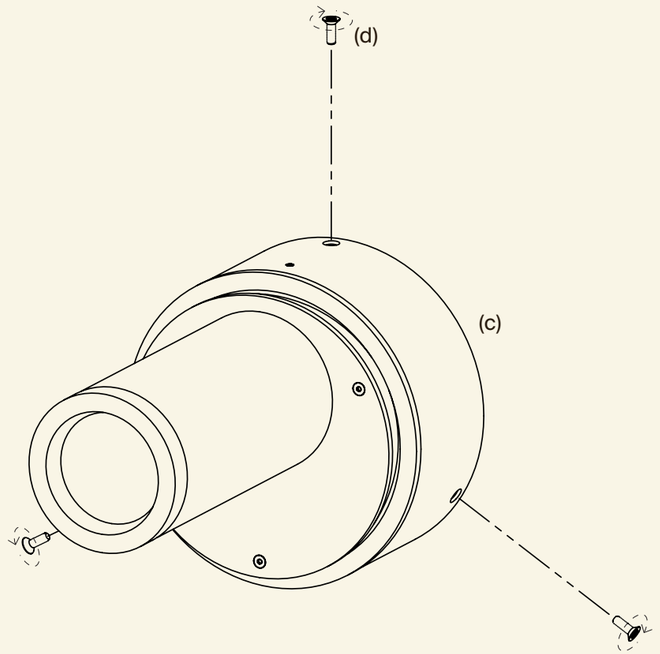

3.


Cover the crossbar with the fixture body (c), aligning the mounting holes in the fixture body to the threaded holes in the crossbar. Then use the provided screws (d) to secure the body to the crossbar.

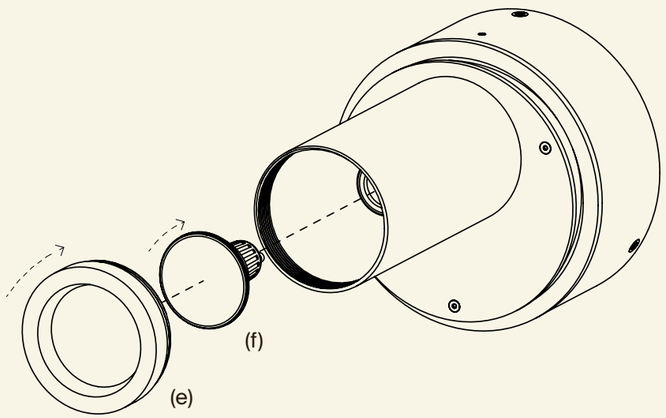

4.


Unscrew the lens cap (e) to expose the socket. Install the bulb* (f) in the socket then screw the lens cap back on.

*Bulb is not included

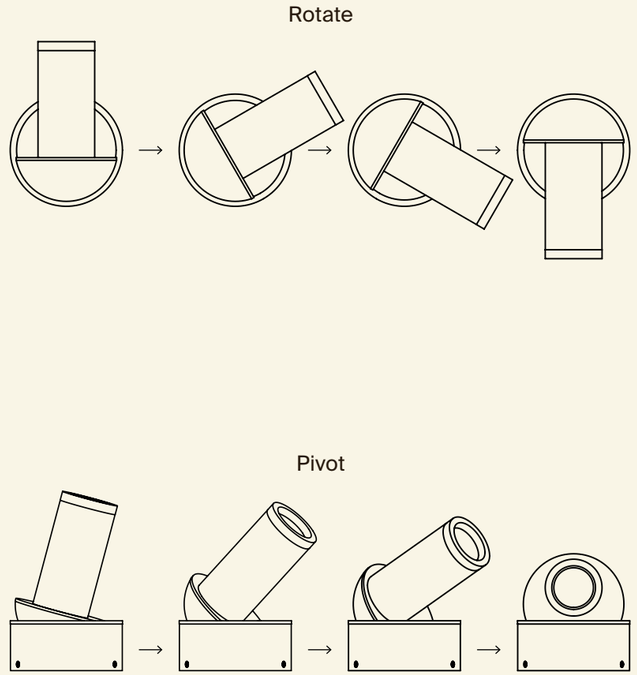

5.

Gently rotate and pivot the lamp to achieve the desired position. Note that the lamp can pivot a maximum of ~90 degrees each direction from center, and rotate a maximum of ~360 degrees.

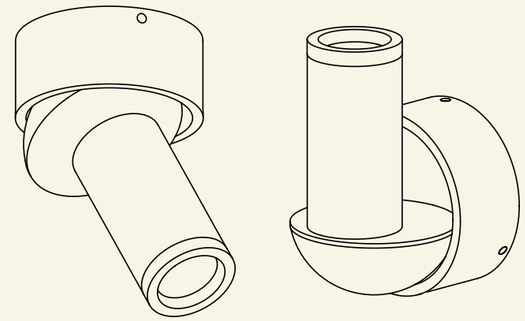

6.

FIXTURE COMPLETE